
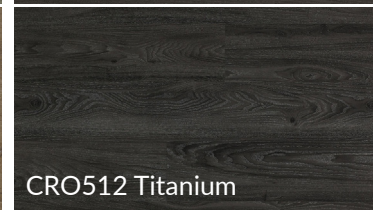










**AGS Sourcing  
Loose Lay**

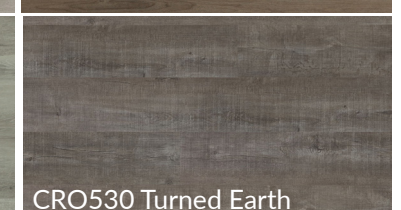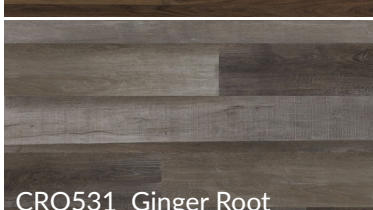

 CRO502 Driftwood	 CRO504 Thunder Cloud	 CRO507 Autumn Leaf	 CRO509 Weathered Barn
 CRO510 Mohave Sand	 CRO512 Titanium	 CRO514 Barn Barrel	 CRO515 Saltwood
 CRO516 Skyfall Grey	 CRO517 Castlewood	 CRO518 Coconut	 CRO521 Almond Toffee
 CRO523 Warm Cinnamon	 CRO526 Eiffel Grey	 CRO527 Soft Pearl	 CRO530 Turned Earth
 CRO531 Ginger Root	 CRO532 Marina Grey	 CRO533 Monarch Oak	 CRO553 Chromia
 CRO5934 Courtyard Oak	 CRO5935 Millennium Oak	 CRO5936 Colonial	 CRO5T37 Boulder Grey
 CRO5T38 Sea Shell	 CRO5T39 Mercury	 CRO5957 Fossil Brown	 CRO558 Remixx



## AGS Sourcing Loose Lay SPECIFICATIONS

Constructions	PVC
Thickness	5mm
Wear Layer	20 mil
Size	7" x 48" , 9" x 48" & 12" x 24"
Finish	Polyurthane w/nano silver
Edge Detail	Square edge
Sf Per Carton	23.33
Sf Per Pallet	1166.5
Installation	Loose Lay (glue down optional)
Classificaiton	Best
Residential Warranty	Lifetime Limited Residential
Commerical Warranty	12 Year Limited Heavy Com-merical
Suggested Adhesive	Armstrong S 288 / Armstrong S 310

## PERFORMANCE TESTING

Reaction To Fire	EN ISO 11925-2   Pass EN ISO 9239-1   Pass
Chemical Resistance	ASTM F925   Pass
Light Resistance	ASTM F1515   < 8
Wear Resistance	ASTM F510   Wear group P EN 434   ≤ 0.25%
Static Electrical Propensity	0.5kV
Residual Indentation	EN 433   ≤ 0.1mm
Anti-Slip Property	DIN 51130   R10
Voc Emission	ISO 16000   A+
Phalates	EN 14372   N.D. CPSC-CH-C 1101   Pass
Castor Chair	ISO 4918   Pass

## AGS Sourcing Loose Lay

